


PVC Tag

Product Data Bulletin

Description:

Flexible plastic is printed with UV resistant, ecosolvent ink. Tag is attached to equipment with cable tie. Recommended for indoor and outdoor business and industrial environments. Service temperatures up to +150 F.

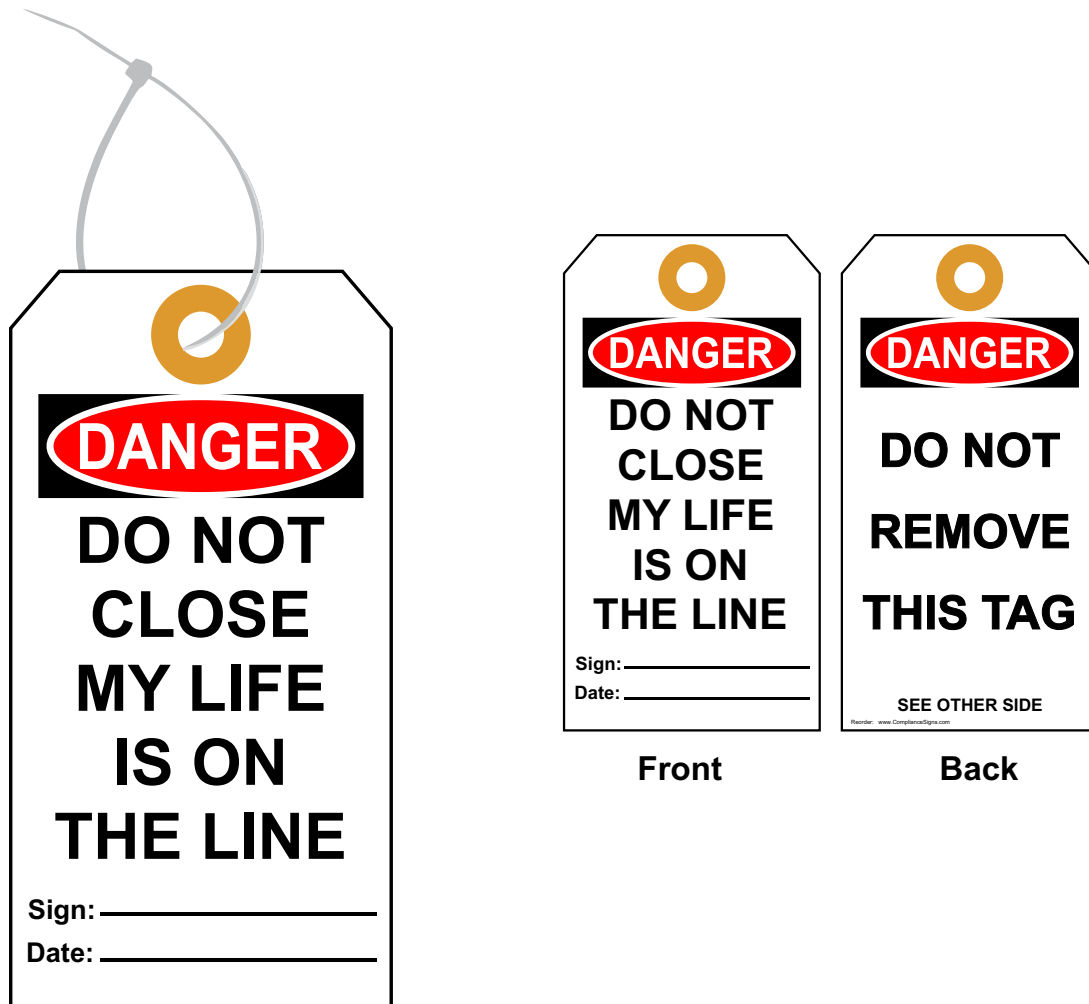

Specifications:

SUBSTRATE:	0.015" Flexible PVC Plastic
PRINTING LAYER:	UV Stable Eco-solvent ink - direct to substrate printing
GROMMET:	3/8" diameter - Brass
MOUNTING:	7" or 11" - 50 lb Cable Tie