


Dry Erase

Product Data Bulletin

Description:

Aluminum direct to substrate signs printed with UV ink. Lamination formulated for use with “dry erase” is applied over the printing layer, allowing users to quickly and easily update sign content. Recommended for indoor business and industrial environments. Service temperatures -40 F to +176 F.

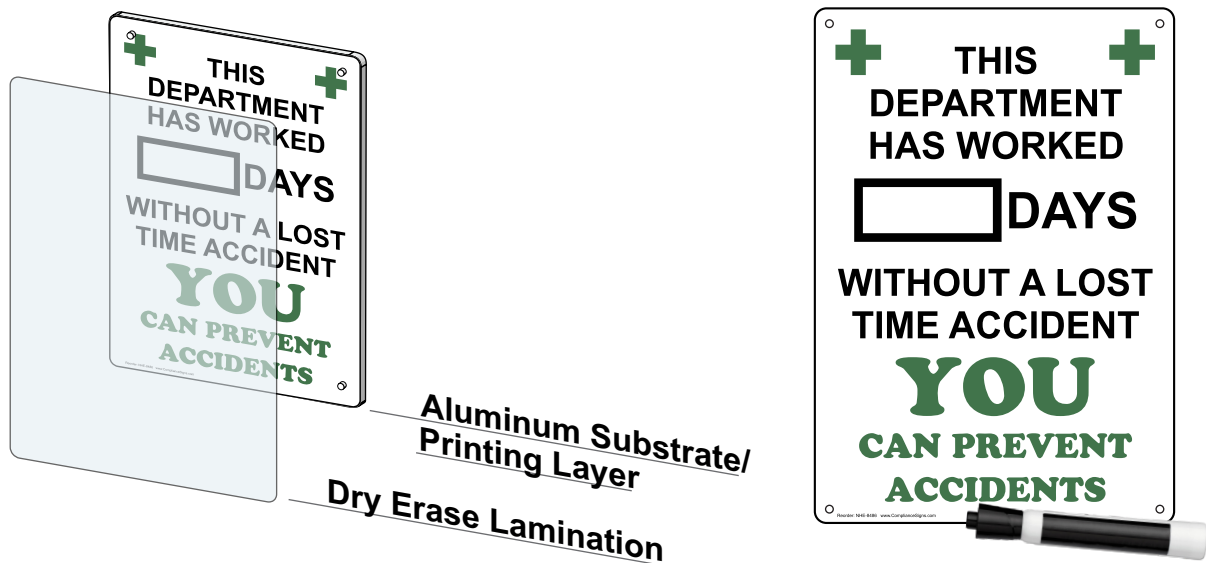

Specifications:

SUBSTRATE/ PRINTING LAYER:	0.040" (1mm) aluminum, white enamel coated both sides Printed with UV ink
LAMINATE:	2.0 mil, Dry Erase Film (Optically Clear) <ul style="list-style-type: none"> • Scratch Resistant • Resistant to Dry Erase Ink Formulations • Limited UV Resistance for Laminate.
MOUNTING:	3/16" diameter holes in each of 4 corners Holes offset 0.25" from adjacent edges Mounting hardware not included
CORNERS:	0.25" Radius Corners
OPTIONS:	Available for additional charge: <ul style="list-style-type: none"> • Adhesive backing with or without holes • Reflective or Glow-in-the-Dark