


PVC Plastic Signs

Product Data Bulletin

Description:

Plastic direct to substrate signs printed with UV ink, reinforced with UV, chemical, abrasion, and moisture resistant laminate. Recommended for indoor and outdoor business and industrial environments. Service temperature range -40 F to +176 F.

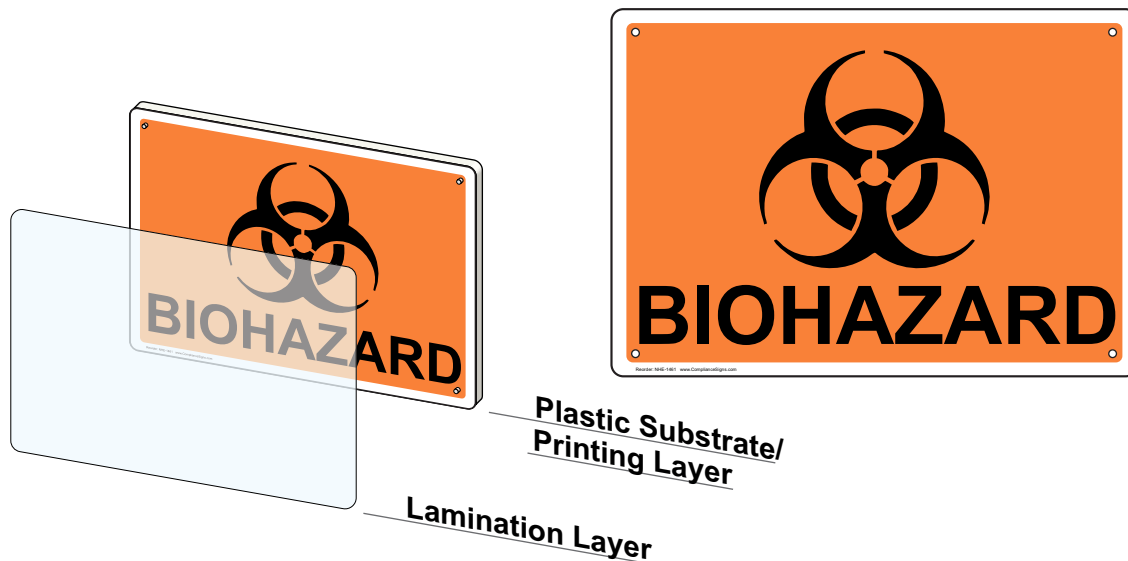

Specifications:

SUBSTRATE/ PRINTING LAYER:	0.04" (1mm) Low Density / Semi-Rigid PVC Plastic Printed with UV ink
LAMINATE:	<ul style="list-style-type: none">• Scratch Resistant• Chemical Resistant• UV Resistant
MOUNTING:	3/16" diameter holes in each of 4 corners Holes offset 0.25" from adjacent edges Mounting hardware not included
CORNERS:	0.25" Radius Corners
OPTIONS:	Available for additional charge: <ul style="list-style-type: none">• Adhesive backing with or without holes• Reflective or Glow-in-the-Dark• Anti-graffiti and Anti-skid / Floor laminate options