


2D Projection Signs – View 2 Sides

Product Data Bulletin

Description:

Aluminum direct to substrate signs printed with UV ink, reinforced with UV, chemical, abrasion, and moisture resistant laminate. One inch flange is shaped to allow protrusion mounting on a vertical surface. Recommended for indoor and outdoor business and industrial environments. Service temperature range -40 to +176 F.

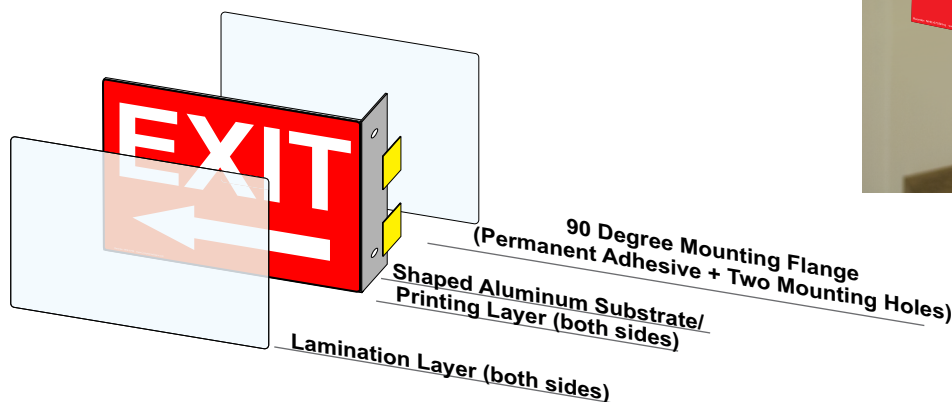

Specifications:

**SUBSTRATE/
PRINTING LAYER:**

0.040" (1mm) aluminum, white enamel coated both sides
Printed with UV ink

LAMINATE:

- Scratch Resistant
- Chemical Resistant
- UV Resistant

MOUNTING:

Adhesive Mounting Strips + Two 0.20" Holes for Screw Mount
on shaped flange

CORNERS:

0.25" Radius Corners

OPTIONS:

Available for additional charge:

- Reflective or Glow-in-the-Dark